

V2 Series


DALI Dimming LED Driver

DALI调光LED恒流驱动器

Features:

- Constant current driver
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Cooling by free air convection
- 100% full load burn-in test
- High efficiency, long life and high reliability
- IP67 design for indoor or outdoor

- 恒流型驱动
- 输出开路, 短路, 过载和超温保护
- 自然风冷
- 100%满载老化测试
- 高效率, 长寿命, 高可靠性
- IP67等级设计, 使用于室内和户外使用

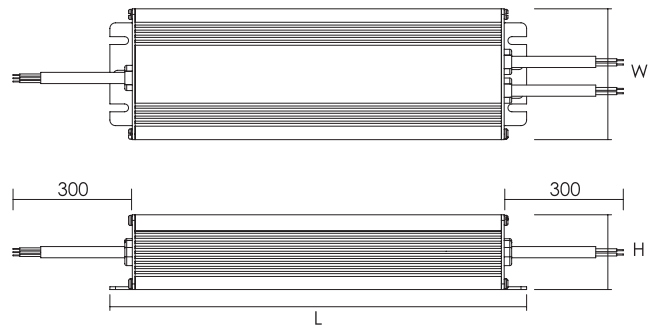

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 t _a (°C)	Max. casing temperature 最大外壳温度 t _c (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
V2-120-2400D	220-240	120	2400	30-50	0.95	91	<0.5	-20...+50	80	SELV	191x70x40	850
V2-150-2400D	220-240	150	2400	40-63	0.95	92	<0.5	-20...+50	80	SELV	191x70x40	850
V2-160-3200D	220-240	160	3200	30-50	0.95	92	<0.5	-20...+50	80	SELV	191x70x40	850
V2-200-3200D	220-240	200	3200	40-63	0.95	93	<0.5	-20...+50	85	SELV	249x72x40	1100
V2-200-4000D	220-240	200	4000	30-50	0.95	92	<0.5	-20...+50	85	SELV	249x72x40	1100
V2-240-3700D	220-240	240	3700	40-65	0.95	92	<0.5	-20...+50	75	SELV	249x72x40	1200

DALI Dimming LED Driver